


# SWITCHES

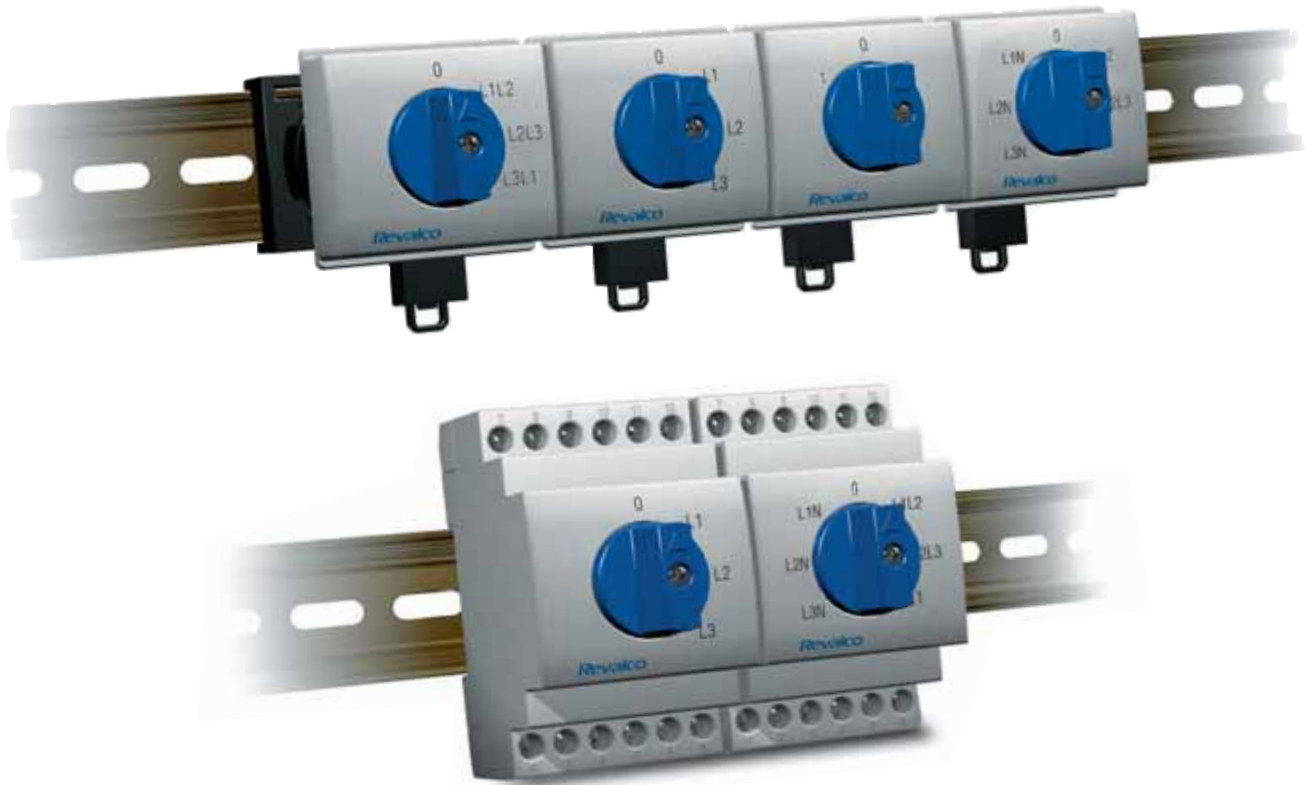

## TECHNICAL CHARACTERISTICS

The **switches** shown in this catalogue have been manufactured to the following standards: CEI 23-11, CEI 17-11, CEE 24, VDE 0660 T107.


- Welded contacts in Silver/Nickel.
- Polycarbonate insulation material and galvanized steel screws.
- Insulation voltage 660V with 12A nominal current in AC1.
- Mechanical life is approx 1.5 million operations within an ambient temperature range of -20°C to + 60°C.
- Terminals are protected to IP40 and have passed the “electric finger” test, and can be increased with the utilisation of special protectors.

It is not necessary to earth the switches as all the rotating parts are insulated from the input voltage terminals.

## DIMENSIONS in mm



- The 52.5 mm dimensions correspond to 3 DIN modules (17.5 mm each)
- Weight: 0,13 Kg

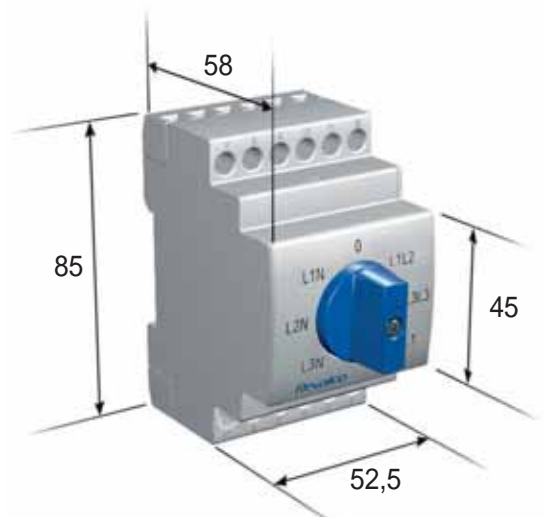



- The 52.5 mm dimensions correspond to 3 DIN modules (17.5 mm each)
- Weight: 0,22 Kg

# VOLTMETER SELECTOR SWITCHES

## PHASE - NEUTRAL CONNECTION

1RCO1215D



45°

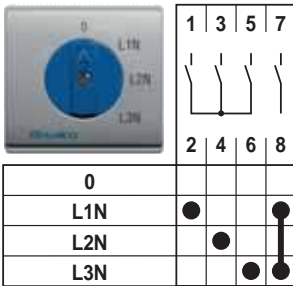

## PHASE - PHASE CONNECTION

1RCO1216D



45°

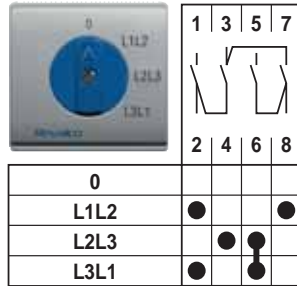

## PHASE - PHASE AND PHASE - NEUTRAL CONNECTION

1RCO1218D


45°

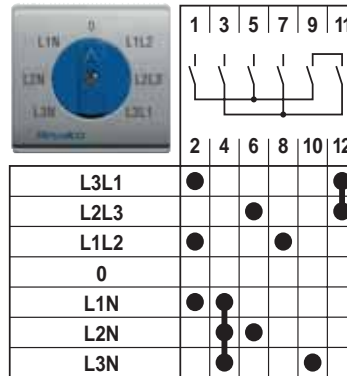

## PHASE - PHASE AND PHASE - NEUTRAL CONNECTION IN CASE

1RCO1218DS

45°


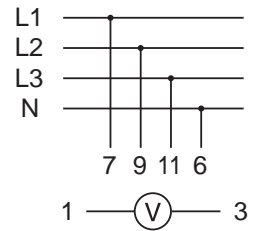


# AMMETER SELECTOR SWITCHES

## ONE - POLE FOR 3 CURRENT TRANSFORMERS

1RCO1222D


45°

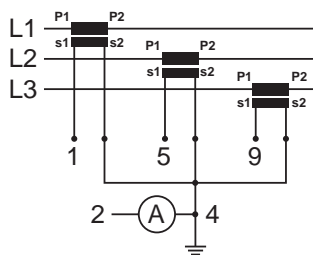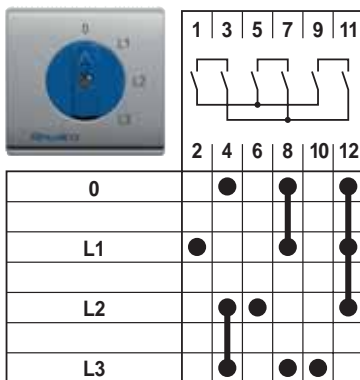

## ONE - POLE FOR 3 CURRENT TRANSFORMERS IN CASE

1RCO1222DS

45°

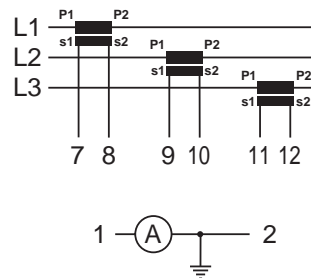



# CHANGE - OVER SWITCHES

# REVERSING SWITCHES

## SINGLE - POLE

1RCO1205D



45°

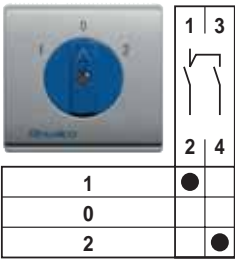

## TWO - POLE

1RCO1206D



45°

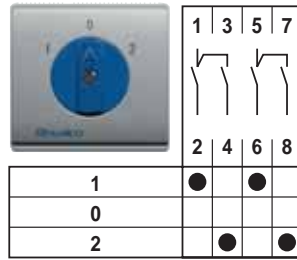

## THREE - POLE

1RCO1207D



45°

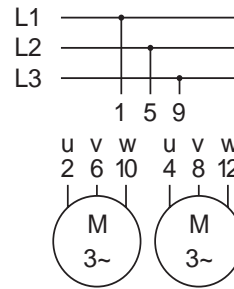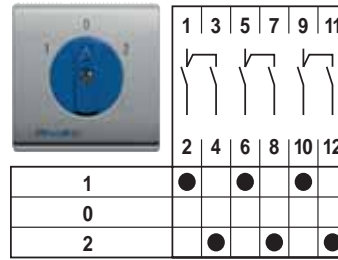

## THREE - POLE

1RINV1208D

45°

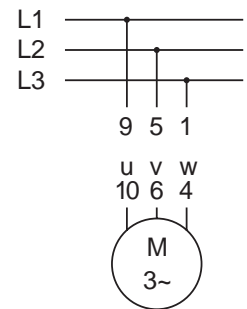
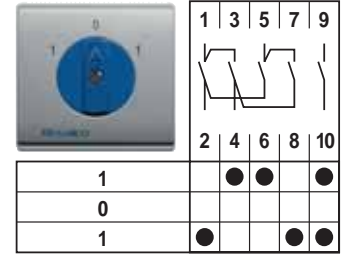


# ON-OFF SWITCHES

## SINGLE - POLE

1RIN1201D



45°

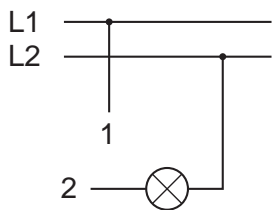

## TWO - POLE

1RIN1202D



45°

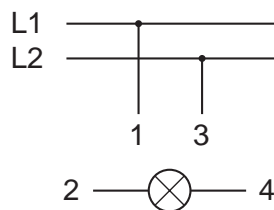

## THREE - POLE

1RIN1203D



45°

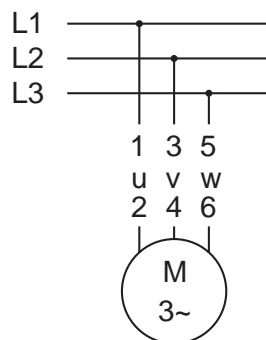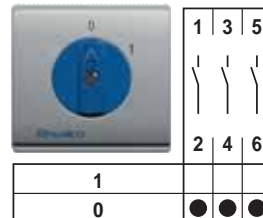

## FOUR - POLE

1RIN1204D

45°

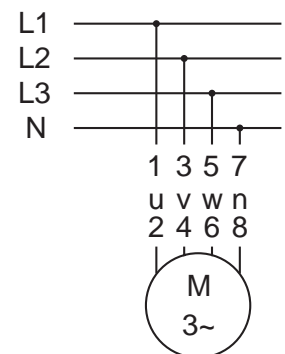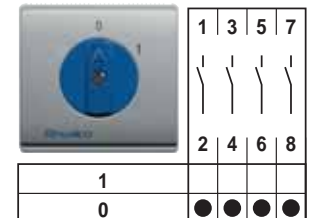

# ACCESSORIES

## PROTECTION AIDS

ADF109 Flexible terminal protector (transparency)

